


Socket outlet Austrian/German system

• STANDARD •	
	16 Amp
Poles	2P + E
a	50
b	37,5
c	9
d	29
e	4,3
f	43
Connection type:	Screwed contact
Wire flexible [mm ²]	1 - 2x2,5
solid [mm ²]	1 - 2x2,5
Contact screws [Ncm]	80
Weight [g]	34

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP20

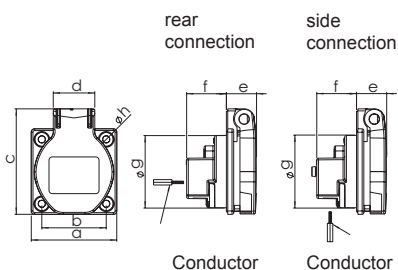


Socket outlet Austrian/German system

• STANDARD •	
	16 Amp
Poles	2P + E
a	50
b	38
c	62
d	25
e	18
f	24
g	43
h	4,2
Connection type:	Screwed contact
Wire flexible [mm ²]	1 - 2x2,5
solid [mm ²]	1 - 2x2,5
Contact screws [Ncm]	80
Weight [g]	45

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof

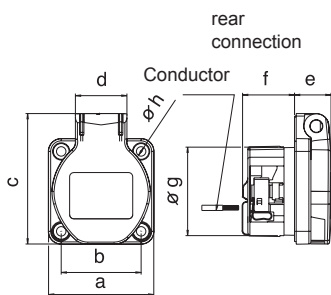


Socket outlet Austrian/German system

• STANDARD •	
	16 Amp
Poles	2P + E
a	50
b	38
c	62
d	25
e	17
f	26
g	43
h	4,2
Connection type:	Screwless
Wire flexible [mm ²]	1 - 2x2,5
solid [mm ²]	1 - 2x2,5
Weight [g]	43

- screwless connection technology
- housing material: PA6
- contacts: nickel-plated contacts
- rear connection

IP54 splashproof

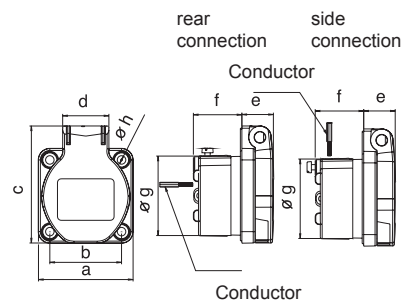

Socket outlet Austrian/German system

	• STANDARD •		• SPECIAL •	
	16 Amp	16 Amp	16 Amp	16 Amp
Poles	2P + E	2P + E	2P + E	2P + E
a	50	70	75	75
b	38	56	60	60
c	62	72	75	75
d	25	25	25	25
e	17	17	17	17
f	26	26	26	26
g	43	43	43	43
h	4,2	5,5	5,5	5,5
Connection type:	Screwed contact			
Wire flexible [mm ²]	1 - 2x2,5			
solid [mm ²]	1 - 2x2,5			
Contact screws [Ncm]	80			
Weight [g]	45	50	51	51

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof





STANDARD

SPECIAL

SPECIAL

250V~
50/60Hz
Flange
50x50250V~
50/60Hz
Flange
70x70250V~
50/60Hz
Flange
75x75

PCE

Amp.	Poles	pack. unit	Abbreviations/Types
------	-------	------------	---------------------

Cat.No.

Cat.No.

Cat.No.

16	3	100	
----	---	-----	--



„SC“ side connection, with child protection (shutter)

10584-0wsc



10584-0wsc

16	3	100	
16	3	100	
16	3	100	
16	3	100	



rear connection (standard)

„S“ side connection

„C“ rear connection, with child protection (shutter)

„SC“ side connection, with child protection (shutter)

1050-0b

1050-0bs

1050-0bc

1050-0bsc



1050-0b

16	3	100	
16	3	100	



rear connection (standard)

„C“ rear connection, with child protection (shutter)

109-0b

109-0bc



109-0b

16	3	100	
16	3	100	
16	3	100	
16	3	100	



rear connection (standard)

„S“ side connection

„C“ rear connection, with child protection (shutter)

„SC“ side connection, with child protection (shutter)

105-0b

105-0bs

105-0bc

105-0bsc

105-7b

105-7bs

105-7bc

105-7bsc

105-8b

105-8bs

105-8bc

105-8bsc

105-0b
Flange = 50x50105-8b
Flange = 75x75

Special versions are available on request. For more information about our ordering system, please have a look on page 154.

Minimum order quantity for special versions: 1.000 pieces

