


Flanged sockets sloping

Flanged socket sloping IP44

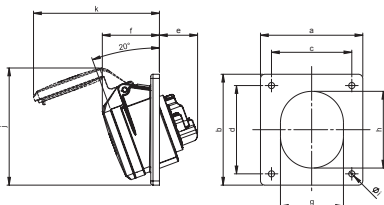


	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	92	92	92	92	92	92
b	100	100	100	100	100	100
c	77	77	77	77	77	77
d	85	85	85	85	85	85
e	33	34	38	48	48	48
f	49	51	52	54	54	55
g	51	56	65	65	65	70
h	61	67	76	75	75	80
i	5,5	5,5	5,5	5,5	5,5	5,5
j	86	102	107	107	107	101
k	102	107	111	121	121	132
Connection type:	Screw terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	141	146	175	199	218	246

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 415-6f9v

IP44 splashproof
IP44/54 16/5 and 32/5 are splash- and dustproof

Turbo Twist Flanged socket sloping IP44

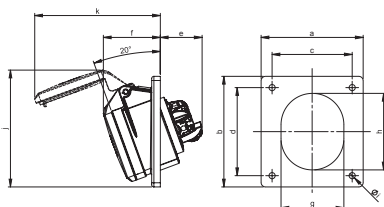


	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	92	92	92	92	92	92
b	100	100	100	100	100	100
c	77	77	77	77	77	77
d	85	85	85	85	85	85
e	37	38	38	48	48	48
f	49	51	52	54	54	55
g	51	56	65	65	65	70
h	61	67	76	75	75	80
i	5,5	5,5	5,5	5,5	5,5	5,5
j	86	102	107	107	107	101
k	102	107	114	121	121	132
Connection type:	Screwless terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
solid [mm²]	1-4			2,5-10		
Weight [g]	141	147	170	199	218	226

- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 415-6TTf9v

IP44 splashproof
IP44/54 16/5 and 32/5 are splash- and dustproof

Flanged socket sloping IP67

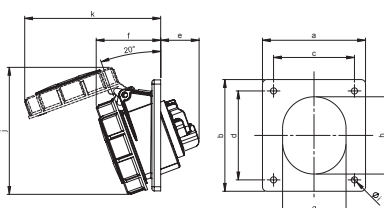


	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	92	92	92	92	92	92
b	100	100	100	100	100	100
c	77	77	77	77	77	77
d	85	85	85	85	85	85
e	33	34	38	48	48	48
f	53	55	58	62	62	62
g	51	56	65	65	65	70
h	61	67	76	75	75	80
i	5,5	5,5	5,5	5,5	5,5	5,5
j	101	105	114	120	120	128
k	107	115	122	130	130	131
Connection type:	Screw terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
solid [mm²]	1-4			2,5-10		
Contact screws [Ncm]	100 Ncm			110 Ncm		
Weight [g]	160	167	199	221	237	280

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 4152-6v

IP67 watertight

Turbo Twist Flanged socket sloping IP67

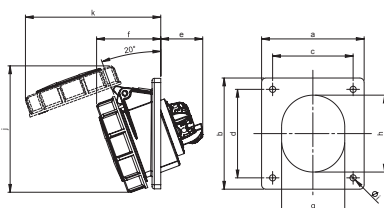

	16 Amp			32 Amp		
Poles	3	4	5	3	4	5
a	92	92	92	92	92	92
b	100	100	100	100	100	100
c	77	77	77	77	77	77
d	85	85	85	85	85	85
e	33	34	38	48	48	48
f	53	55	58	62	62	62
g	51	56	65	65	65	70
h	61	67	76	75	75	80
i	5,5	5,5	5,5	5,5	5,5	5,5
j	101	105	114	120	120	128
k	107	115	122	130	130	131
Connection type:	Screwless terminal					
Wire flexible [mm²]	1-2,5			2,5-6		
solid [mm²]	1-4			2,5-10		
Weight [g]	149	168	203	220	237	281


- screwless connection technology
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 4152-6TTv

IP67 watertight

Amp.	Poles	pack unit	110V~ 50/60Hz 4h	230V~ 50/60Hz 3p=6h 4p+5p=9h	400V~ 50/60Hz 3p=9h 4p+5p=6h	500V~ 50/60Hz 7h	>50- 500V~ 100-300Hz 10h	>50- 500V~ 301-500Hz 2h
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.

flange 92 x 100 - fixing center 77 x 85

16	3	10	413-4f9	413-6f9	413-9f9	413-7f9	413-10f9	413-2f9
16	4	10	414-4f9	414-9f9	414-6f9	414-7f9	414-10f9	414-2f9
16	5	10	415-4f9	415-9f9	415-6f9	415-7f9	415-10f9	415-2f9
32	3	10	423-4f9	423-6f9	423-9f9	423-7f9	423-10f9	423-2f9
32	4	10	424-4f9	424-9f9	424-6f9	424-7f9	424-10f9	424-2f9
32	5	10	425-4f9	425-9f9	425-6f9	425-7f9	425-10f9	425-2f9



415-6f9

flange 92 x 100 - fixing center 77 x 85

16	3	10	413-4TTf9	413-6TTf9	413-9TTf9			
16	4	10	414-4TTf9	414-9TTf9	414-6TTf9			
16	5	10	415-4TTf9	415-9TTf9	415-6TTf9			
32	3	10	423-4TTf9	423-6TTf9	423-9TTf9			
32	4	10	424-4TTf9	424-9TTf9	424-6TTf9			
32	5	10	425-4TTf9	425-9TTf9	425-6TTf9			



425-9TTf9

flange 92 x 100 - fixing center 77 x 85

16	3	10	4132-4	4132-6	4132-9	4132-7	4132-10	4132-2
16	4	10	4142-4	4142-9	4142-6	4142-7	4142-10	4142-2
16	5	10	4152-4	4152-9	4152-6	4152-7	4152-10	4152-2
32	3	10	4232-4	4232-6	4232-9	4232-7	4232-10	4232-2
32	4	10	4242-4	4242-9	4242-6	4242-7	4242-10	4242-2
32	5	10	4252-4	4252-9	4252-6	4252-7	4252-10	4252-2



4132-6

flange 92 x 100 - fixing center 77 x 85

16	3	10	4132-4TT	4132-6TT	4132-9TT			
16	4	10	4142-4TT	4142-9TT	4142-6TT			
16	5	10	4152-4TT	4152-9TT	4152-6TT			
32	3	10	4232-4TT	4232-6TT	4232-9TT			
32	4	10	4242-4TT	4242-9TT	4242-6TT			
32	5	10	4252-4TT	4252-9TT	4252-6TT			



4142-6TT

