

Thermoplastic insulated distribution boxes **DELTA**[▲]

Series LOFER7




Series LOFER7

- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x140 mm**
- Switchgear up to 9 modules, behind transparent window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable

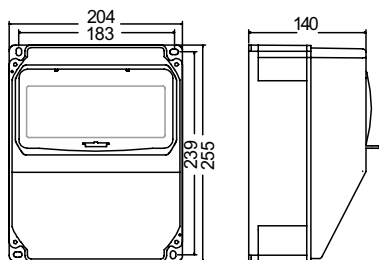

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 2xMCB 16A 1p-B	1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 25A RDF 0,8	9018112
			1	2	1xRCD 40A/4/0.03A (TYPE A 25AT)	1xMCB 16A 3p-C 1xMCB 16A 1p-B	1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 25A RDF 0,8	9018114
		1		2	1xRCD 63A/4/0.03A (TYPE A 40AT)	1xMCB 32A 3p-C 2xMCB 16A 1p-B	1xM32 (hole) top, 1xM32 (blind cap) bottom	InA 32A RDF 0,6	9018164
				4	1xRCD 40A/4/0.03A (TYPE A 25AT)	4xMCB 16A 1p-B	1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 25A RDF 0,7	9018012
		1	1			1xMCB 16A 3p-C	1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 32A RDF 0,6	9018088
			2			2xMCB 16A 3p-C	1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 32A RDF 0,8	9018161