

Thermoplastic insulated distribution boxes DELTA[▲] Series MURAU/SCHWAZ

Series MURAU/SCHWAZ


- **Socket outlet combination acc. EN 61439**
- Housing made of high durable PC/ABS, compact design
- **Dimensions HxWxD = 255x204x114 mm**
- MURAU: Switchgear up to 4 modules, behind transparent window
- SCHWAZ: without window
- Ready wired for connection
- **IP54** (IP67 on request)

Standard version:

- All outer metal parts made out of stainless steel, captive screws
- Switchgear built in under impact resistant window
- Ready wired on main connecting terminal for wiring through
- Opening for cable gland on top, blind cap on bottom
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable




MURAU: 9013329

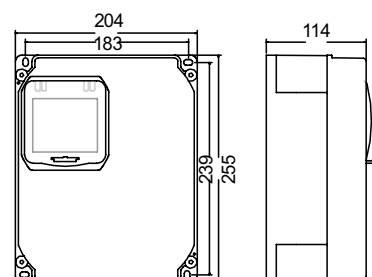

Layout examples: (other combinations on request!)

Layout	CEE 400V 5p			SS 250V	Protection		Connection	InA RDF	Cat.No.
	63A	32A	16A	16A	RCD	MCB			
				5	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 16A RDF 0,7	9013039
			1	3	1xRCD 40A/4/0.03A (TYPE A 25AT)		1xM25 (hole) top, 1xM25 (blind cap) bottom	InA 16A RDF 0,7	9013031
			2	4			1xM20 (cable gland (ø10-14mm) top	VS max.16A	9014120

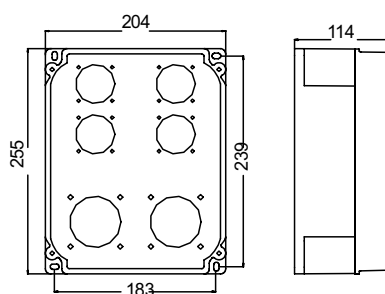

SCHWAZ: 9014120