


Solid-rubber distribution boxes – mobile Series TRAUNSEE

Series TRAUNSEE

- **Socket outlet combination acc. EN 61439**
- Portable solid rubber distribution box
- **Dimensions: HxWxD = 165x260x90 mm**
- With or without fuse protection
- Ready wired for use
- Housing protection **IP54**

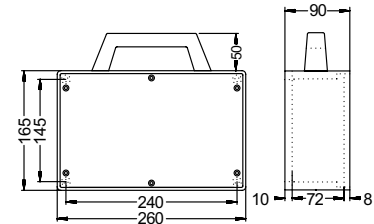

Standard version:

- Enclosure with solid rubber carrying handle
- CEE-sockets and safety sockets made of PA6, contacts nickel plated, sockets individual exchangeable
- Entry connection made out of flexible rubber cable with plug

Layout examples: (other combinations on request!)

| Layout | CEE 400V 5p | | | SS 250V | Protection | | Connection | InA RDF | Cat.No. |
|--------|----------------|-----|-----|------------|---|-----|--|--------------------|----------------|
| | 63A | 32A | 16A | 16A | RCD | MCB | | | |
| | | | 1 | 2 | | | 1,5m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V | VS max.16A | 9216051 |
| | | | 1 | 2 | 1 x RCD 25A/2/0.03A (TYP A 25AT) only over safety sockets | | 1,5m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V | InA 16A RDF 0,9 | 9216052 |
| | | | | 3 | 1 x RCD 25A/2/0.03A (TYP A 25AT) | | 1,5m cable H07RN-F 3G2,5 with solid rubber plug 16A 2p+PE 230V | InA 16A | 9216066 |
| | | | | 4 | | | 1,5m cable H07RN-F 3G2,5 with solid rubber plug 16A 2p+PE 230V | VS max.16A | 9216011 |